

Performance you can trust

Contractor® *fusion*

Part Code:	White	44080
	Yellow	44081
	Blue	44082
	Red	44083
	Green	44084
	Black	44085

Pack Size: 750ml

No of Pages	03
Issue No	01
Date	27.5.10
Ref	CONTF



Description

Contractor® *fusion* semi-permanent spot/survey marking paints from Rocol were developed over 12 months. After comprehensive research, extensive field trials, working with our major corporate customers and the people that use spot marking paints every day, we formulated this unique product for the market.

Contractor® *fusion* supports corporate purchasers social and environmental responsibilities, minimising the Health and Safety risks for the user without compromising the trusted superior performance you would expect from a Rocol product. Many of the features are unique when compared against other spot marking paints on the market.

Features and Benefits

- Non-irritant formula*
- Not harmful to the environment*
- Not harmful to aquatic life*
- Up to 90% more paint when compared against the majority of the market today
- Up to 60% less Volatile Organic Compounds (VOC's) than other spot/survey marking systems
- Effective on damp and 0°C surfaces
- Patented clog-free cap
- One pass system gives excellent, bright durable markings that are required to last 3 – 6 months**
- Extra tough 18Bar rated aerosol cans minimizes risk of puncture or failure in high temperatures
- Fast drying – touch dry in 5 minutes
- Colour coded range for cable, water, gas and electric company use.
- Suitable for marking surfaces such as asphalt or tarmac, concrete, metals, timber, soil, grass sand and gravel, artificial and natural stone, brickwork and composites

*Evaluated under EC Directive 1999/45/EC

**Duration may vary due to surface conditions, weather, paint thickness and traffic levels. We recommend you test a small area before use.

T +44 (0) 113 232 2600
F +44 (0) 113 232 2740
E customer-service@rocol.com
www.rocol.com

ROCOL House, Swillington, Leeds LS26 8BS

Registered Company No. 559693 VAT No. 742 0531 67
Registered Office: Admiral House, St Leonard's Road, Windsor, Berkshire SL4 3BL

ROCOL A division of **ITW** Ltd



BS EN ISO 9001
Certificate No. FM 12448



BS EN ISO 14001
Certificate No. EMS 67596



OHSAS 18001
Certificate No. OHS 78173



INVESTOR IN PEOPLE

Performance you can trust

Technical Data (Typical)

Colour:	White, Yellow, Red, Blue, Green and Black
Drying Times @ 20°C: Touch Dry:	5 minutes
Vehicular - No pick up time – BS6044	30 minutes
Shelf Life:	2 years
Maximum Chemical Resistance:	4 - 7 days
Cross Hatch Adhesion: BS3900: E6 / BS EN ISO 2409	Very good / excellent
Flexibility: BS EN ISO 6860 / BS 3900 – E11 (Conical Mandrel)	Excellent
Solvent Resistance: (After 7 days)	Slight softening with Xylene, Acetone, MEK and Toluene. Resistant to White Spirit.
Propellant Type:	Hydrocarbon

General Surface Preparation

All surfaces to be marked should be clean, dry, and free from; oil, grease, dust, dirt, algae, moss, road salts and other contaminants before application is started

Any surfaces covered in heavy grime/grease should be cleaned with ROCOL® Heavy Duty Cleaner, thoroughly washed down with water after use and allowed to dry.

Before Application

Shake the can until the agitator balls start to rattle, then continue shaking for at least 1 minute to ensure the paint is fully mixed and there is no settlement.

Depress the nozzle as illustrated:



T +44 (0) 113 232 2600
F +44 (0) 113 232 2740
E customer-service@rocol.com
www.rocol.com

ROCOL House, Swillington, Leeds LS26 8BS

Registered Company No. 559693 VAT No. 742 0531 67
Registered Office: Admiral House, St Leonard's Road, Windsor, Berkshire SL4 3BL

ROCOL A division of **ITW** Ltd



BS EN ISO 9001
Certificate No. FM 12448



BS EN ISO 14001
Certificate No. EMS 67596



OHSAS 18001
Certificate No. OHS 78173



INVESTOR IN PEOPLE

Performance you can trust

Application

Invert the can with the cap pointing downwards, approximately 10cm's from the surface to be marked.

The nearer the cap is to the surface, the more accurate and defined the markings will be.


Contractor® *fusion* spot marking paint is for applications required to last at least between 3 and 6 months.*

*Duration may vary due to surface conditions, weather, paint thickness and traffic levels. We recommend you test a small area before use.

After Use

With the can at arm's length and pointing away from your eyes and face, in an upright position, depress the cap for 3-5 seconds to clear any paint residue. Failure to do this may cause the cap to block.

Finally secure the cap by squeezing the clips together and releasing the trigger:

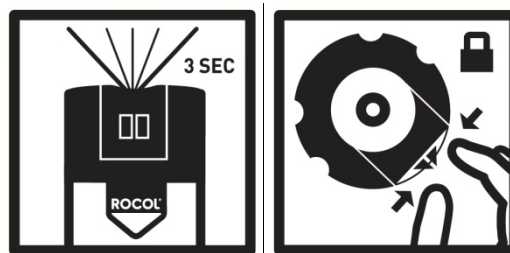

Always store cans of Contractor® *fusion* on their side securely in a cool place away from sources of ignition. Do not store in direct sunlight.

Removing Contractor® Paints

If for any reason you want to remove Contractor® *fusion* paint, use a proprietary solvent based paint stripper and follow the directions on the can. On porous surfaces more than one application of paint stripper may be required.

Warning

Contractor® *fusion* is a pressurised container. Protect from sunlight and do not expose to temperatures exceeding 50°C. Do not spray onto naked flame or any incandescent material. Do not pierce or burn after use.

Health & Safety

Refer to Safety Data Sheet before use. If further copies are required or for further information, please contact us at the address below:

Safety Data Sheets – The latest safety data sheets are available for download from our website www.rocol.com or may be obtained from your usual Rocol® contact.

Disclaimer: The information in this publication is based on our experience and reports from customers. There are many factors outside our control or knowledge which affect the use and performance of our products, for which reason it is given without responsibility.

T +44 (0) 113 232 2600
F +44 (0) 113 232 2740
E customer-service@rocol.com
www.rocol.com

ROCOL House, Swillington, Leeds LS26 8BS

Registered Company No. 559693 VAT No. 742 0531 67
Registered Office: Admiral House, St Leonard's Road, Windsor, Berkshire SL4 3BL

ROCOL A division of **ITW** Ltd



BS EN ISO 9001
Certificate No. FM 12448



BS EN ISO 14001
Certificate No. EMS 67596



OHSAS 18001
Certificate No. OHS 78173



INVESTOR IN PEOPLE