



PREMIER ANODISED DIGITAL TYRE INFLATOR WITH TWIN PUSH-ON CONNECTOR

MODEL NO: **SA37/96B**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions

1. SAFETY

- ✓ Disconnect the inflator from the air supply before changing accessories, servicing or performing any maintenance.
- ✓ Maintain the inflator in good condition (use an authorised service agent), and keep the gauge clean for best and safest performance.
- ✓ Replace or repair damaged parts. *Use recommended parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- ✓ Locate inflator in a suitable work area, keep area clean and tidy and free from unrelated materials and ensure there is adequate lighting.
- ✓ Keep children and unauthorised persons away from the work area.
- ✗ **DO NOT** direct inflator outlet at yourself or at other persons or animals.
- ✗ **DO NOT** carry by the hose, or yank the hose from the air supply.
- ✗ **DO NOT** use the inflator for a task which it is not designed to perform.
- ✗ **DO NOT** operate the inflator when you are tired, under the influence of alcohol, drugs or intoxicating medication.
- ✗ **DO NOT** operate the inflator if any parts are missing or the inflator is damaged, as this may cause failure and/or personal injury.
- ✗ **DO NOT** exceed maximum permissible tyre pressure

2. INTRODUCTION

Anodised black aluminium body with impact absorbing rubber bumper. Features auto power on/power off backlit LCD digital display for ease of use. Calibrated in psi, bar and kPa. 0.5m flexible hose fitted with 240mm twin push-on air connector. Features a battery level indicator, powered by 2 x AAA batteries (supplied). Supplied with a serial numbered calibration certificate. 3 year warranty.





3. SPECIFICATION

Model no:**SA37/96B**
Range: 0.3 - 17.2 bar (4 -250 psi) (30 - 1720 kPa)
Accuracy: 5-60 ±1psi, 61-145 ±2psi, 146-250 ±3.6psi
Pressure units: bar, psi, kPa
Inlet size: 1/4" BSP
Battery: 2 x AAA (supplied)
Battery run time: 400 hours

4. OPERATION

4.1. BATTERY CHANGE (fig.2, fig.3, fig.4)

- 4.1.1. The inflator requires 2 AAA batteries.
- 4.1.2. When the battery state indicator symbol (fig.1) shows empty, the batteries need replacing.
- 4.1.3. Unscrew the end cover, remove old batteries and replace with new ones. Replace end cover - **DO NOT** overtighten it.

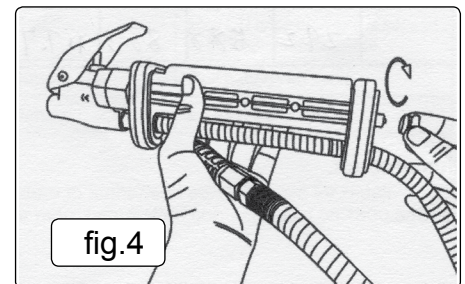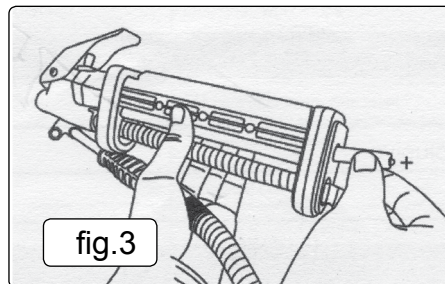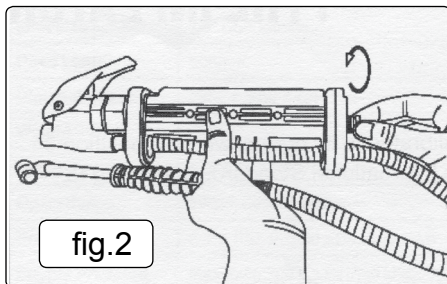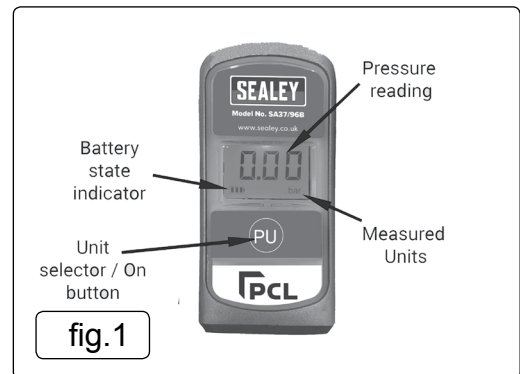

4.2. ON / OFF / UNITS

- 4.2.1. The unit switches on when either tyre pressure is sensed or the On button (fig.1) is depressed.
- 4.2.2. To change units of measurement hold down the button (fig.1) for 2 seconds to cycle through each option (bar, psi, kPa).
- 4.2.3. The unit switches itself off approximately 25 seconds after its last use.

4.3. INFLATE / DEFLATE

- 4.3.1. To inflate a tyre locate the valve connector squarely and firmly onto the tyre's valve. Depress the lever (fig.5) for 10 - 20 seconds, release the lever and check tyre pressure reading. Continue until the required pressure is achieved.
- 4.3.2. To deflate a tyre locate the valve connector squarely and firmly onto the tyre's valve. Slowly depress the lever (fig.5) to its half way position when escaping air can be heard. Hold steady for 10 to 20 seconds then release the lever and check tyre pressure reading. Continue until the required pressure is achieved.



5. MAINTENANCE

- 5.1. Regularly check condition of all hoses. Replace if necessary.
- 5.2. Regularly check fixings. Re-tighten or replace if necessary.
- 5.3. To clean the unit, wipe with a damp cloth.

Parts support is available for this product. Please log on to www.sealey.co.uk, email sales@sealey.co.uk or telephone 01284 757500



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



BATTERY REMOVAL

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd Batteries Producer Registration Number (BPRN) is BPRN00705.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 36 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk