


MOTIP Bitumen Undercoating 500ml

Ord.-no.: 000007

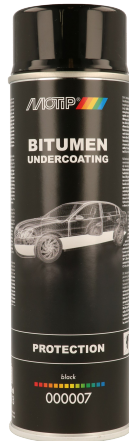

Technical Information

Protect the bottom of your car against weak acids and bases with MOTIP Bitumen Undercoating. Bitumen based undercoating is resistant to the weather and weak acids and bases and has an excellent rust prevention. Bitumen based undercoating remains flexible and is sound-absorbing.

Quality & properties

- Remains flexible
- Excellent adhesion
- Resistant to weather influences
- Resistant to weak acids and bases
- Excellent corrosion prevention
- Sound-absorbing

Physical & chemical data

- Base: Bitumen
- Colourname: black
- Smell: Characteristic
- Dust dry: 60 min
- Surfaces: Underside of vehicles
- Minimum Working Temperature: 10 °C
- Maximum Working Temperature: 25 °C
- Vapour pressure: 3500/20 bar
- Flash point: n.a.
- Storage stability: 5 y
- Content: 500 ML

How to use

- Before use, carefully read the directions on the packaging and act accordingly.
- Remove loose old lacquer and rust and sand the surface.
- The surface should be clean, dry and free of grease. The aerosol should have room temperature. Best processing temperature 15 to 25°C.
- Before use, shake the aerosol for 2 minutes and spray a sample. Distance to the surface to be treated approximately 25 to 30 centimetre.
- Apply the undercoating in several layers.
- After use, clean the valve (turn aerosol upside down and press the nozzle for approximately 5 seconds).
- The drying time depends on the ambient temperature, the humidity of the air and the thickness of the lacquer applied.

Environmentally sound

European Aerosols is committed to apply formulations without restricted or critical ingredients and to achieve best possible performance. The caps and packagings are made of recyclable material.

Disposal

Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".

Marking/Labeling

All products made by European Aerosols comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

For any further technical questions call our hotline +31 (0) 561 69 44 00 from Monday to Thursday from 9 h a.m. to 3 h p.m. or on Friday until 12 h p.m.

As of May 11, 2022 – This release replaces all eventually earlier issued versions.