



MECHANICS UTILITY SEAT

MODEL NO: **SCR9.V3**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions

1. SAFETY

- WARNING!** Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this seat.
- ✓ Locate seat in a suitable working area.
- WARNING!** Use seat on level and solid ground, preferably concrete.
- ✓ Keep the seat clean and tidy in accordance with good workshop practice.
- ✗ **DO NOT** use the seat for any purpose other than that for which it is designed.
- ✗ **DO NOT** stand on the seat.
- ✗ **DO NOT** use the seat outdoors.
- ✗ **DO NOT** get the seat wet or use in damp or wet locations or areas where there is condensation.
- ✗ **DO NOT** clean the seat with any solvents which may damage the paint surface or the protective coating on the padded seat base.
- ✗ **DO NOT** exceed maximum capacity of 110kg.

2. INTRODUCTION


Steel framework with powder coated finish. Extra thick cushioned padding for added comfort when seated. Easy-rolling Ø63mm rubber castors with ball bearing swivel. Composite storage tray for tools and components.

3. SPECIFICATION

Model No..... **SCR9.V3**
 Max. Capacity110kg
 Overall Size (W x D x H)355 x 360 x 385mm

4. ASSEMBLY

- 4.1. Start by placing the tray on the base frame. Slot the castors through the frame from the underside and secure to the tray with the cap nuts, washers and split washers.
- 4.2. Attach the two seat support frames to the base frame with the four bolts, cap nuts and washers.
- 4.3. Place the seat cushion upside down, place the two support bars on the underside of the cushion. Turn the framework upside down and place on top of the cushion and support bars, secure using the four screws and washers.
- 4.4. Turn the seat upright, the product is now ready to use.

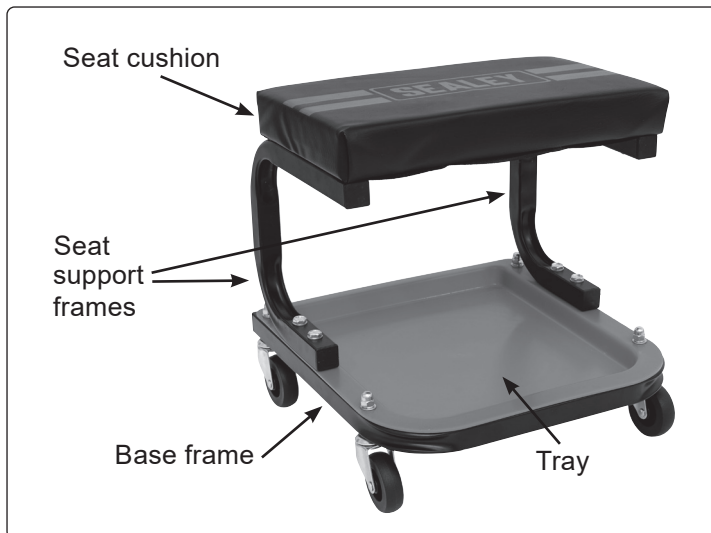

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk