DOUGLAS YACHT VARNISH

Douglas Yacht Varnish is a traditional marine-quality varnish. UV resistant and alkyd-urethane resin based, it offers ultimate long-lasting protection for all interior and exterior wooden surfaces. It is suitable for domestic, industrial and all marine application protecting against weathering, UV rays and salt water.

Preparation
Ensure the surface is clean, dry and free from any wax, oil, grease and dirt. Remove any loose or flakey material and sand surface with fine sandpaper. Surface may be primed first with a suitable primer.

Application
Stir well before use. It may be applied by brush, roller or airless spray.

Coverage
8-11 square metres per litre. Allow a minimum of 8 hours before applying subsequent coats. Obviously the ambient temperature and humidity will affect drying times. It is recommended to apply a minimum of 2 coats.

Clean-Up
Remove as much product from equipment as possible before washing with Douglas White Spirits. Do not empty product into drains or waterways. Some local authorities have special facilities for disposal of waste coatings. Dispose of application cloths and cleaning rags etc safely to avoid fire risks (wash out well in soapy water before disposal).

Health & safety

DANGER

Contains: Solvent naphtha (petroleum), medium aliph.

Flammable liquid and vapour.
Causes damage to organs through prolonged or repeated exposure.

If medical advice is needed, have product container or label at hand.
Keep out of reach of children.
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
Do not eat, drink or smoke when using this product.
Get medical advice/attention if you feel unwell.
Dispose of contents/container to hazardous or special waste collection point, in accordance with local, regional, national and/or international regulation.

EUH208 - Contains Neodecanoic acid, cobalt salt(27253-31-2). May produce an allergic reaction.

Any disposal practice must be in compliance with national laws and regulations. Do not dump into any sewers, on the ground, or into any body of water.

Dispose of contents/container to hazardous or special waste collection point.



DURABLE

STIR WELL


EU limit for this product (Cat: A/i):500g/l.
This product contains a maximum of 500g/l VOC.

CURUST INDUSTRIES LTD.
Unit 7, Bromley Business Park, Farankelly Rd., Greystones, Co. Wicklow. Tel (01) 2760800 info@curust.ie www.curust.ie

℮ **750ml**

Douglas
DECORATIVE RANGE

YACHT VARNISH

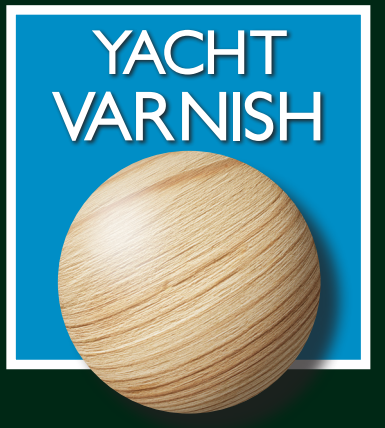

CLEAR GLOSS

SOLVENT BASED

LONG LASTING PROTECTION FOR OUTDOOR WOOD

WEATHER SHIELD
EXCELLENT WEATHER RESISTANCE

HIGH ABRASION RESISTANCE

UV
HIGH UV PROTECTION