

# Pro CF4002K

## 2K Custom Filled

PRO CF4002K is prepared with propellant gas, solvents and original hardener in a separate pre-filled cartridge. The CF4002K is inserted in the can by a filling device and thus ready for the finished product

The mixing of the 2K topcoat with the original hardener achieves an optimal quality with respect to gloss, curing, weather and chemical resistance. Simple, time-saving application. Excellent atomisation. Light blending.

### Suitable substrates

Solvent or water based basecoat paint

### Application data



Depending on consistence and colour of the ground: 400 ml are sufficient for approx. 0,8 m<sup>2</sup>



Depends on surrounding temperature, air humidity and thickness of the applied coat and filled type of paint

### Application method




Before use, shake the aerosol for 2 minutes and spray a sample area.



Apply in cross coats from a distance of 250mm from object.



After use turn aerosol upside down, press the nozzle for approx. 5 sec and clear valve.

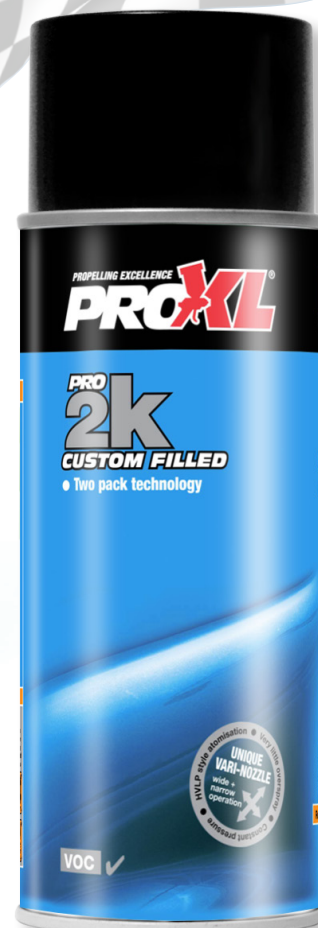

# Pro CF4002K

2K Custom Filled

## Technical data

Chemical base	Acryl
VOC content	305 g/400ml
Coverage	0.30 - 0.40m <sup>2</sup>
Storage notes	empty cans 36 month. Pot life filled cans approx. 12 h (=10°-25°C, relative air humidity of max. 60%)

### Environmentally sound:

The products supplied by ProXL are 100% free of heavy metals and the caps and packaging are made of recyclable material.

### Disposal:

Completely emptied cans should be put in recycling skips or appropriate container. Cans which are not empty should be disposed off as special refuse.

This application and technical information is given to the best of our knowledge. The notes mentioned herein are, however, non-binding and do not exempt you from own tests to see whether the products supplied by us are suitable for your special application. The use and processing is beyond our control and therefore exclusively is the responsibility of the user.

