# BARPLAST ALBORÁN

línea decoración Decoration line / Ligne décoration



**Product Description** 

Paint plastic and matt based on acrylic resins in aqueous dispersion and highly colour fast pigments



## **Technical Characteristics**

Colour	White
Appearance	Matt
Touch-dry	30 minutes, depending on the thickness applied and atmospheric conditions
Repainting	After 2-4 hours
Yield	7-10 m <sup>2</sup> /l, per coat, depending on the state and type of surface
Thinner	Water
Storage	Excellent for up to 1 year/s, unopened, in original packaging, at normal temperature and humidity. Store in places protected against frost.

#### Properties

Easy to apply Good covering power. Finish with maximum whiteness, plain, even and decorative Shades can be achieved with water based dyes

#### Applications

Suitable for: decoration with indoors, walls and plaster ceilings, coving. For general decoration

## Method of Use

Stir the contents of the pot well

Apply in even coats

Application at: Round brush, roller and airless spray gun

#### Preparation of surfaces

The surface should be clean, dry and free from grease, nitre, flaking and must be consistent.

On surfaces dry and hard (well set plaster) application of 2 coats: the first diluted at 10% and the second slightly diluted or as supplied.

On soft (badly set plaster) or with old plastic paint, temper, lime or other paints surfaces: Remove soft, crumbling, flaking parts... and totally remove limescale

Seal adequately with SELLAFOND AL AGUA and proceed as in the previous case.

# Recommendations before application

Do not apply in temperatures below 5°C.

Other data \_\_\_\_

Packaging

4L, 13L, 15L


Remarks

BARPLAST ALBORÁN



**Oficinas centrales** / Headquarters / Siège social San Fernando, 116. D.P. 26300 Nájera. La Rioja. Spain Tel. (34) 941 410 000 / Fax (34) 941 410 111 / www.barpimo.com

Page 1 / 2

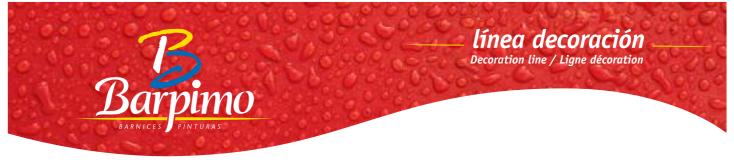

Shake contents of containers before use. For toxicological standards, consult FICHA DE SEGURIDAD. Do not store opened or started containers. Apply with good air renewal.

This sheet has been created with informational purposes only and does not replace expert advice. The information provided reflects our current knowledge and have been obtained from our own experience, but under no circumstance do they entail any warranty whatsoever from our part. For this reason, we cannot accept any undesired consequence deriving from its use. 08-11-2013 This sheet replaces all previous versions.



# BARPLAST ALBORÁN

Page 2 / 2

*Oficinas centrales /* Headquarters / Siège social San Fernando, 116. D.P. 26300 Nájera. La Rioja. Spain Tel. (34) 941 410 000 / Fax (34) 941 410 111 / www.barpimo.com